


DRYLAM

SELECTION ♦ SOLUTIONS ♦ SIMPLICITY

ALM3230 Automatic Laminator

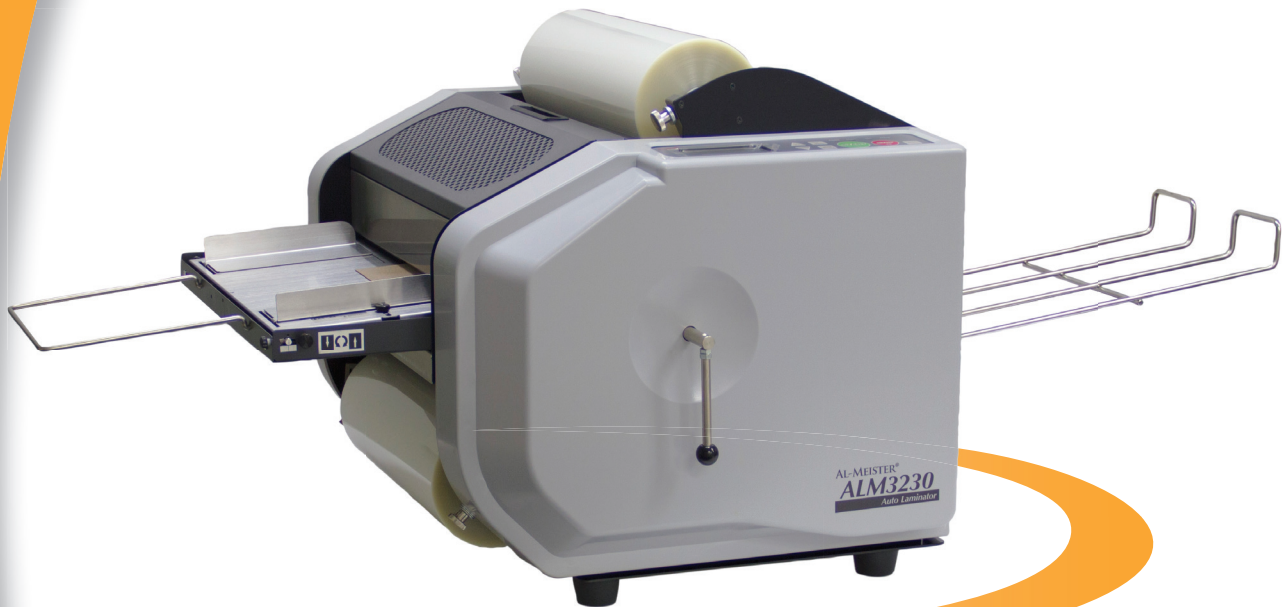

Labor-free automation with feeding, laminating, and trimming at the touch of a button!

- Heated rollers for crystal clear scratch-free laminations
- Adjustable trim for full encapsulation or precise flush cut
- Sits on a tabletop or optional stand
- Green Button Operation: touch the button and walk away for labor-free, fully trimmed and laminated sheets
- ASAP adhesive laminating films in 1.5, 3, and 5 mil, gloss, matte, and Elegant Silk Matte adheres to hard-to-laminate digitally printed sheets

Eliminate time-consuming, costly hand feeding and trimming in laminating with the new value priced ALM3230 lamination system!

msl
midstatelitho.net

5459 Fenton Rd. | Flint, MI 48507

Phone: 810-238-7370

ALM3230 Automatic Laminator



ALM3230 Automatic Laminator

Key Features:

- Small Foot Print – less than 4 sq. ft.
- Table Top or optional stand with locking roller casters
- 115 Volt, 15 amp service with economy mode
- Ultra quick warm up of less than 5 minutes
- Virtually Unattended Operation
- Digital Sheets sizes: 13"x19", 12"x18", 11"x17", 8.5"x11"
- Laminates copy paper up to 100lb cover stock
- Automatic two side lamination or short one side work
- Adjustable Automatic Flush or Sealed edge trim
- 1 year parts and labor warranty

ALM Exclusive ASAP Roll Film

- Perfect for Digital Print technology
- Anti-static properties

ALM Exclusive ASAP Roll Film

- 1.5mil, 12.6" x 984 ft
- 3.0mil, 12.6" x 492 ft
- 5.0mil, 12.6" x 328 ft
- 1.2mil, 12.6" x 984 ft, One Side Nylon set (Gloss & Matte Versions)



Model ALM 3230

Laminating Speed	Fixed speed at 40"/min.
Temperature Range	170-270°F
Ultra Fast Warm-Up Time	Approximately 5 minutes
Film Thickness	1.5, 3, and 5 mil
Thickness of Objects	20lb bond - 100lb cover
Paper Feeding Capacity	100 Sheets, Adjustable Paper Guide
Applicable Sizes:	<p>Letter Paper Size 8½" x 11"</p> <p>Tabloid Paper Size 11" x 17"</p> <p>Digital Paper Size 12" x 18"</p> <p>Digital Paper Size 13" x 19"</p>
Trimming Methods	(2 modes) Flush trim or edge seal for all 4 sides of the print
Operation Panel	LCD display for start, stop, temperature, and trim settings, leading and trailing edge side cuts are adjustable
Other Features	Laminated sheet counter, Film tension control, Roller gap lever, Paper thickness feeder adjustment lever
Power Consumption	900W
Power Supply	AC 120V (60Hz)
Net Weight	Laminator 100 Lbs. Stand: 48.5 Lbs.
Optional Accessories	Rolling Stand



5459 Fenton Rd. | Flint, MI 48507
Phone: 810-238-7370